



Plank 03

Steel 240 YP

Optimo 03 Comprising of 14mm dia punched raised holes and 8.5mm dia depressed drainage holes. This punched profile provides excellent slip resistance, unsurpassed high strength to weight ratio and increased drainage owing to the larger holes giving a transparency of 28-32%.



Specifications

PTV guidelines	36+ Low Slip Potential acc. to BS 7976
Dry PTV average	73 multi-directional acc. to BS 7976
Wet PTV average	51 multi-directional acc. to BS 7976
Slip resistance	R13 = slope >35° acc. to DIN 51130
Free area	28-32 %
Upward grip holes	dia. 14 mm
Downward drainage holes	dia. 8,5 mm
C-C grid	36 x 36 mm
Ball proof	15 mm in accordance with BS 4592 20 mm in accordance with BS 4592 35 mm in accordance with BS 4592
	550 °C

Suitable application areas

Access Walkways & Maintenance Platforms

Vehicular







Standard dimensions

Length (mm)	Width (mm)	Height (mm)	Thickness (mm)	Weight per meter (kg)	Weight per m ² (kg)	Finish	Availability	Item No.
6000	63	35	3	2.42		Mill Finish	Stock item	C020000100p
6000	81	35	3	2.76		Mill Finish	Stock item	C020010100p
6000	99	35	3	3.1		Mill Finish	Stock item	C020020100p
6000	117	35	3	3.43		Mill Finish	Stock item	C020030100p
6000	135	35	3	3.77		Mill Finish	Stock item	C020040100p
6000	153	35	3	4.11		Mill Finish	Stock item	C020050100p
6000	171	35	3	4.44		Mill Finish	Stock item	C020060100p
6000	189	35	3	4.78		Mill Finish	Stock item	C020070100p
6000	207	35	3		27.5	Hot-dip galvanised EN 1461	On request	C020080101p
6000	225	35	3	5.45		Mill Finish	Stock item	C020090100p
6000	243	35	3	5.79		Mill Finish	Stock item	C020100100p
6000	261	35	3	6.13		Mill Finish	Stock item	C020110100p
6000	261	35	3		26.2	Hot-dip galvanised EN 1461	On request	C020110101p
6000	333	35	3	7.47		Mill Finish	Stock item	C020120100p
6000	333	35	3		25.1	Hot-dip galvanised EN 1461	On request	C020120101p

Other materials available

Aluminium 6060-T61

Aluminium 3005-16 H66

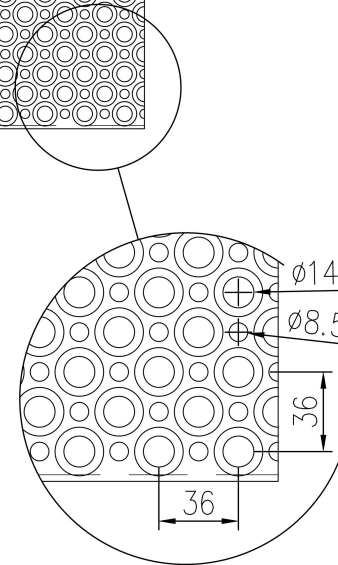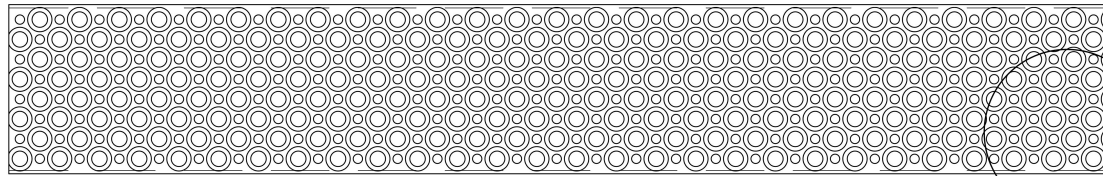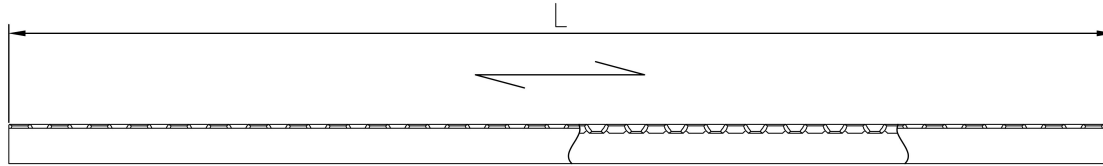

PcP Product name
OPTIMO Plank O3