




Plank 05

Steel 240 YP

Comprising of 5mm dia punched raised and depressed holes, in 2mm/3mm thick material.

This unique punched profile is stiletto proof with exceptional slip resistance and low visual transparency of 8-9%. Manufactured in various combinations in relation to: - width, height, length and profile. Supplied combined together as welded modules for easy fitting or individually to sub-contractors if preferred.

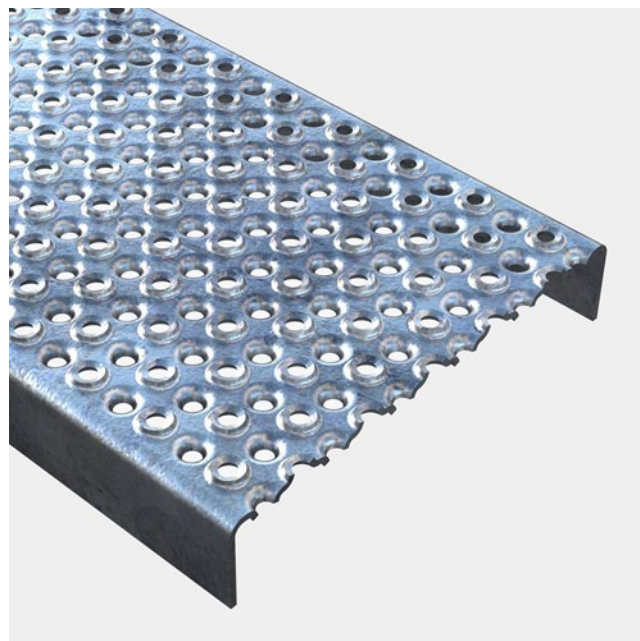

Specifications

PTV guidelines	36+ Low Slip Potential acc. to BS 7976
Dry PTV average	96 multi-directional acc. to BS 7976
Wet PTV average	79 multi-directional acc. to BS 7976
Slip resistance	R13 = slope >35° acc. to DIN 51130
Free area	8-9 %
Upward grip holes	dia. 5 mm
Downward drainage holes	dia. 5 mm
C-C grid	25 x 25 mm
Heel proof	
Ball proof	15 mm in accordance with BS 4592 20 mm in accordance with BS 4592 35 mm in accordance with BS 4592
	550 °C

Suitable application areas

Access Walkways & Maintenance Platforms

Public access

Escape routes

Motorway gantries



Featured cases

Public stairs, landings and walkways - HMS Victory - Portsmouth, England


Related products

Fixing Clip, Lower Part 02

Plank Grating 05

Standard dimensions

Length (mm)	Width (mm)	Height (mm)	Thickness (mm)	Finish	Availability	Item No.
6000	50	33	2	Mill Finish	Stock item	C032000100p
6000	50	33	2	Hot-dip galvanised EN 1461		C032000101p
6000	75	33	2	Mill Finish	Stock item	C032010100p
6000	75	33	2	Hot-dip galvanised EN 1461		C032010101p
6000	87	33	2	Mill Finish		C032020100p
6000	87	33	2	Hot-dip galvanised EN 1461		C032020101p
6000	100	33	2	Mill Finish		C032030100p
6000	100	33	2	Hot-dip galvanised EN 1461		C032030101p
6000	112	33	2	Mill Finish	Stock item	C032040100p
6000	112	33	2	Hot-dip galvanised EN 1461	Stock item	C032040101p
6000	125	33	2	Mill Finish	Stock item	C032050100p
6000	125	33	2	Hot-dip galvanised EN 1461	Stock item	C032050101p
6000	137	33	2	Mill Finish		C032060100p
6000	137	33	2	Hot-dip galvanised EN 1461	Stock item	C032060101p
6000	150	33	2	Mill Finish	Stock item	C032070100p
6000	150	33	2	Hot-dip galvanised EN 1461	Stock item	C032070101p
6000	62	33	2	Mill Finish	Stock item	C042000100p
6000	62	33	2	Hot-dip galvanised EN 1461		C042000101p
3000	300	45	2	Mill Finish	On request	C042080100p
3000	275	45	2	Mill Finish	Stock item	C042090100p
3000	300	45	2	Mill Finish	Stock item	C042100100p
3600	112	45	2	Mill Finish	Stock item	C042110100p
3600	87	45	2	Mill Finish	Stock item	C042120100p
3600	200	45	2	Mill Finish	Stock item	C042130100p
3600	150	45	2	Mill Finish	Stock item	C042140100p
3600	125	45	2	Mill Finish	Stock item	C042150100p
3600	100	45	2	Mill Finish	Stock item	C042160100p
3600	200	45	2	Mill Finish	Stock item	C042170100p
3600	225	45	2	Mill Finish	Stock item	C042180100p
3600	250	45	2	Mill Finish	Stock item	C042190100p
3000	200	45	2	Mill Finish	On request	C042200100p
3000	275	45	2	Hot-dip galvanised EN 1461	Stock item	C042090101p
3000	300	45	2	Hot-dip galvanised EN 1461	On request	C042100101p
3600	200	45	2	Hot-dip galvanised EN 1461	On request	C042170101p
3600	225	45	2	Hot-dip galvanised EN 1461	Stock item	C042180101p
3600	250	45	2	Hot-dip galvanised EN 1461	On request	C042190101p

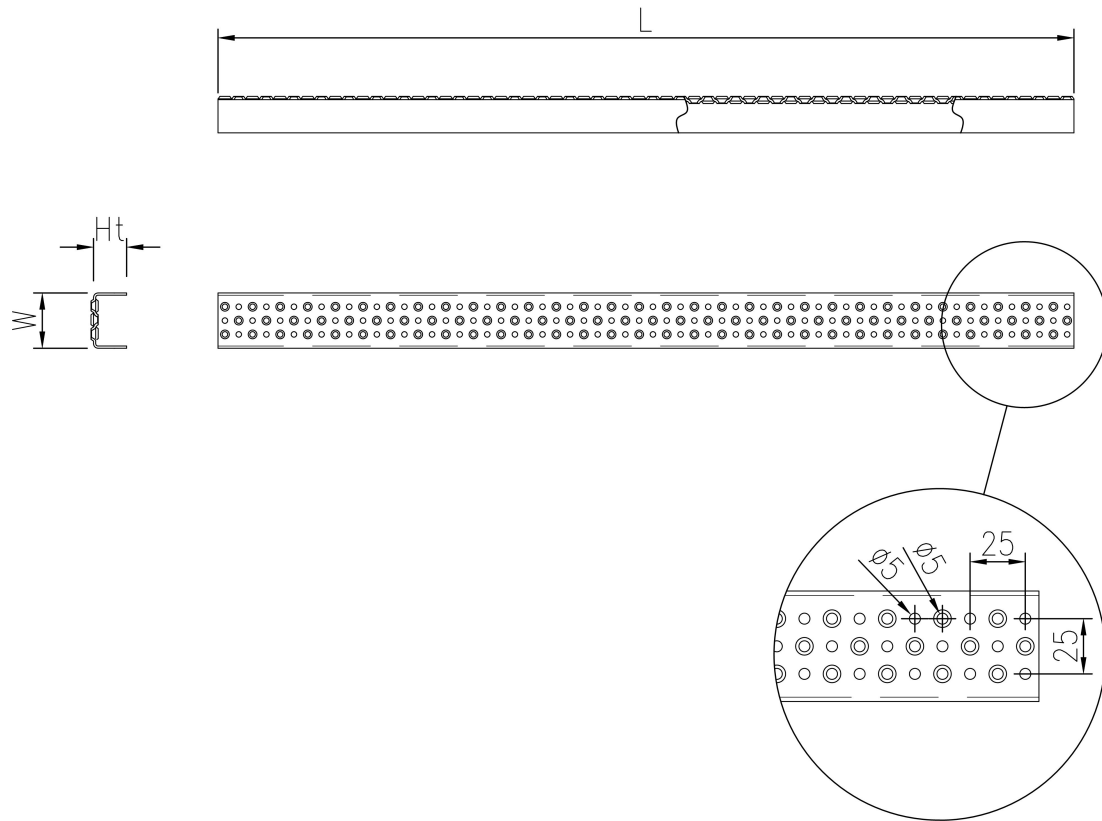

Product name
OPTIMO Plank O5