




Plank Grating O3

Steel

Safety gratings Type O3™ are applied where slip resistance and strength is required. Punched and drainage holes gives the gratings optimal strength/weight ratio. Gratings Type O3™ are produced in different dimensions, materials and profiles.

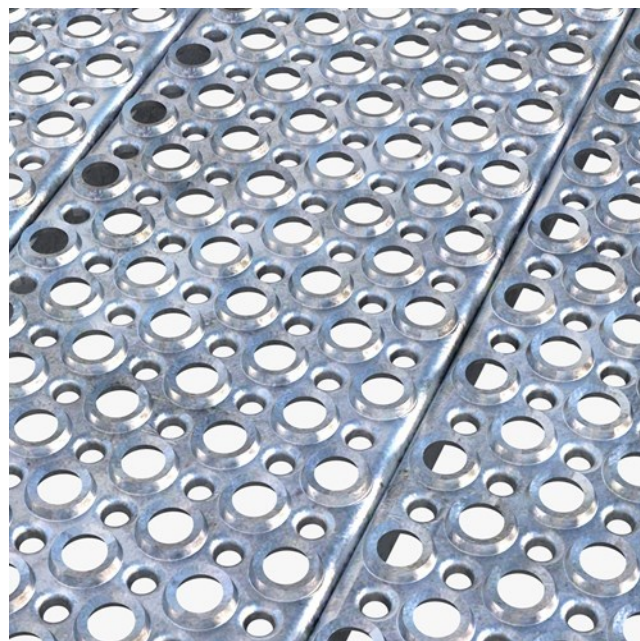

Specifications

PTV guidelines	36+ Low Slip Potential acc. to BS 7976
Dry PTV average	73 multi-directional acc. to BS 7976
Wet PTV average	51 multi-directional acc. to BS 7976
Slip resistance	R13 = slope >35° acc. to DIN 51130
Free area	28-32 %
Upward grip holes	dia. 14 mm
Downward drainage holes	dia. 8,5 mm
C-C grid	36 x 36 mm
Ball proof	15 mm in accordance with BS 4592 20 mm in accordance with BS 4592 35 mm in accordance with BS 4592
Fire resistance Critical temperature	550 °C

Suitable application areas

Access Walkways & Maintenance Platforms

Vehicular



Accessories

Fixing Clip, Lower Part 03

Fixing Clip UNI ø6

Related products

Plank 03


Fixing Clip, Lower Part 03

Fixing Clip UNI ø6

Other materials available

Stainless steel

Aluminium 3005-16 H66

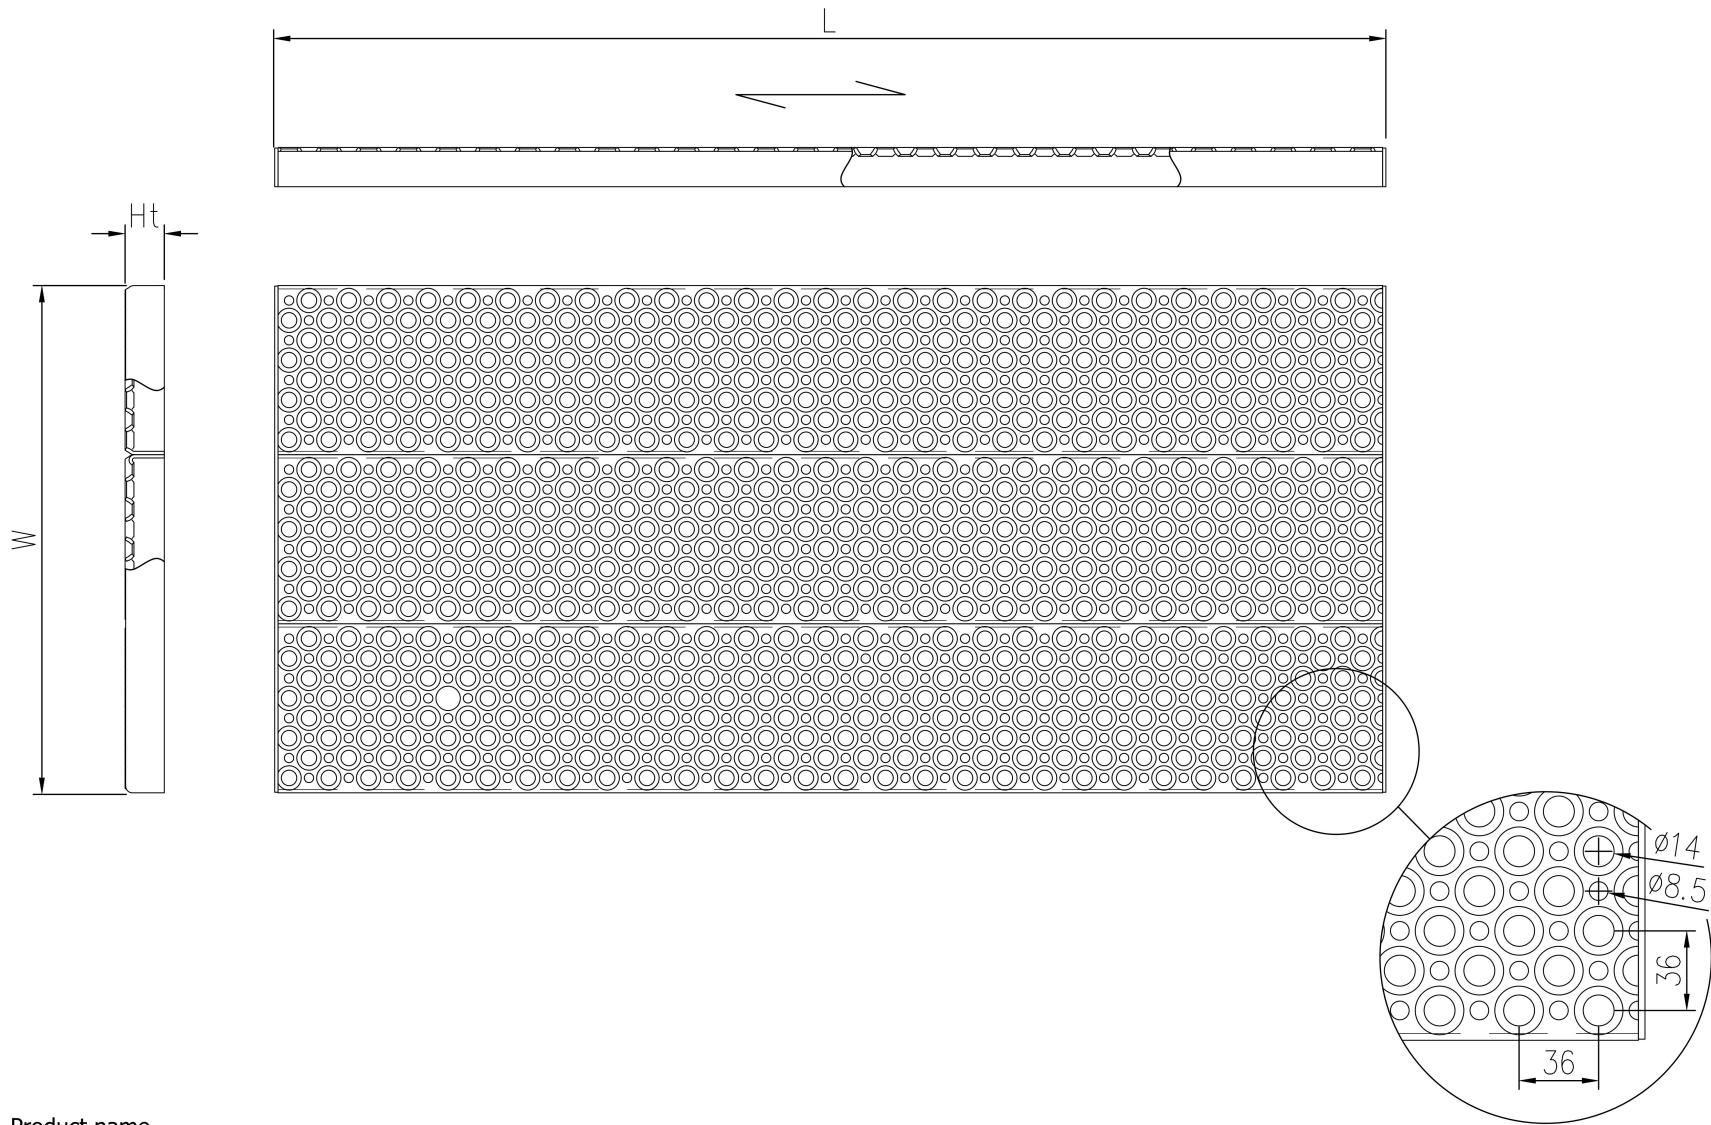

PcP Product name
OPTIMO Plank grating O3