




Plank grating D

Stainless steel

Safety gratings Type D is characterised by raised surface without holes. Type D is applied where closed surface is required and is a strong alternative to deck plating.

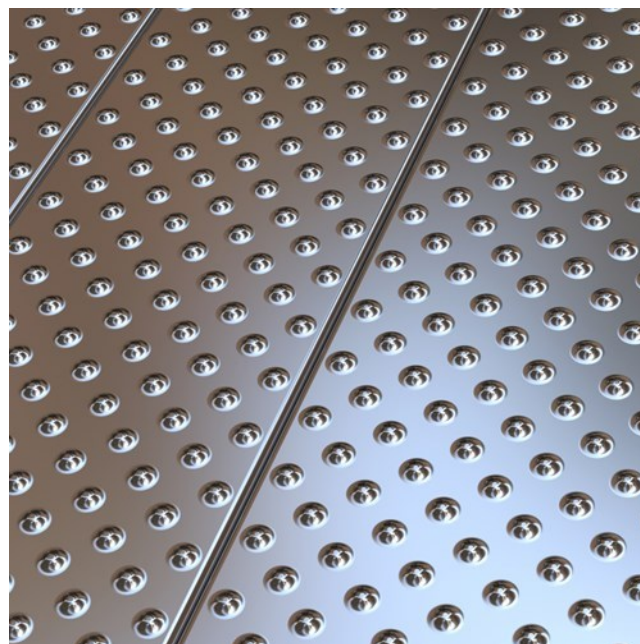


Specifications

Heel proof	
Closed surface	
PTV guidelines	36+ Low Slip Potential
Dry PTV average	86
Wet PTV average	60
Free area	~0 %
Ball proof	15 mm in accordance with EN ISO 14122-2 20 mm in accordance with EN ISO 14122-2 35 mm in accordance with EN ISO 14122-2

Suitable application areas

Public access
Rail gantries
Vehicular
Access Walkways & Maintenance Platforms

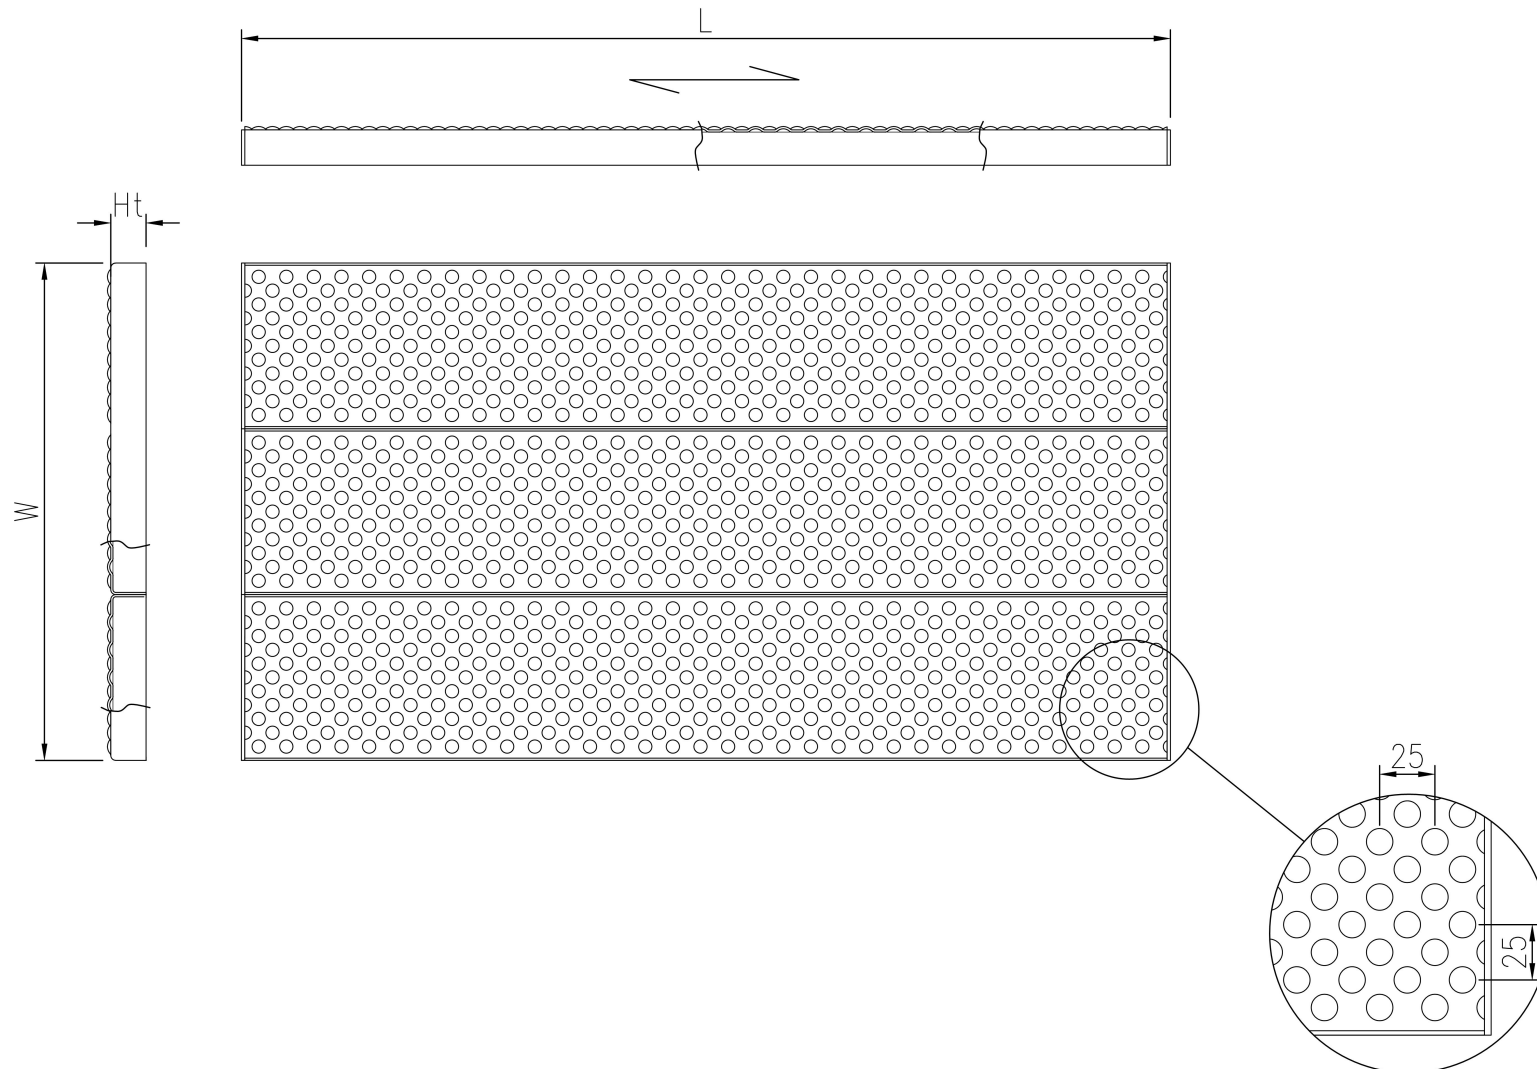

Product name
OPTIMO Plank Grating D2