




Mesh grating 33/22

Steel 240 YP

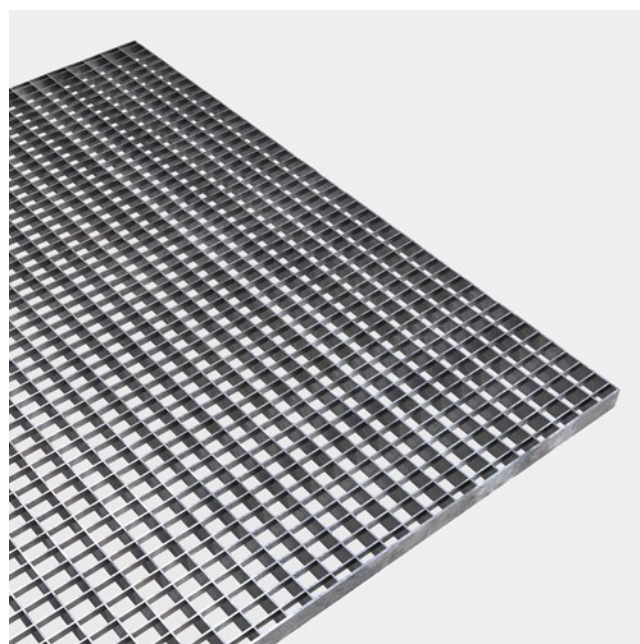

Specifications

PTV guidelines	25-35 Moderate Slip Potential
Dry PTV average	60
Wet PTV average	25
Slip resistance	R9 = 10° > slope > 6° acc. to DIN 51130
Free area	82 %
Distance between bearing bars (Ma)	33 mm
Distance between filler bars (Mc)	22 mm
Ball proof	35 mm in accordance with EN ISO 14122-2 20 mm in accordance with EN ISO 14122-2
	550 °C

Featured cases

Little Belt Bridge - Public walkways and screening

Accessories

Fixing clip, upper part Ma22

Fixing clip, lower part

Related products

Fixing clip, upper part Ma22

Fixing clip, lower part
